

MODERN MACHINERY

摩登机械

20 多年的技术和经验

MORE THAN 20 YEARS TECHNOLOGY & EXPERIENCE



张家港摩登机械有限公司
zhangjiagang modern machinery co.,ltd.

www.zjgmodern.com

 **Modern** MORE THAN 20 YEARS TECHNOLOGY&EXPERIENCE

Company Profile

企业简介

张家港市乐余经济开发区，是一家集水处理成套设备，饮料灌装生产线，包装生产线，制造，研发为一体的高新技术企业。同时是最早从事生产液体灌装设备的厂家之一，目前已成为中国中小型含气灌装设备技术水平，品种最齐全的优秀灌装设备供应商。

Zhangjiagang Modern Machinery Co., Ltd. is located in the Leyu economic development zone. We are a professional beverage filling equipment manufacturer, specializing in beverage production and packaging complete lines, as well as various water treatment machines. As one of the earliest companies engaged in manufacturing liquid filling and packing equipment in China, our company has become an excellent manufacturer supplying various series of hi-tech production lines with advanced technology.


At present, we can provide the following complete sets of production lines:

1. 2,000-24,000b/h mineral water & pure water filling production lines
2. 2,000-24,000b/h fruit juice & fruit tea hot filling production lines
3. 2,000-20,000b/h carbonated drink filling production lines
4. 100-1200b/h 5&3 gallon barreled water filling production lines
5. 1000-8000b/h vinegar & wine filling production lines
6. Complete sets of water purify equipment
7. Turn-key projects

Our products not only sell well in domestic market, but also are exported to overseas including Australia, Mexico, Malta, Russia, Kazakhstan, Armenia, Ukraine, Philippines, Vietnam, Cambodia, India, Pakistan, Iraq, Libya, Nigeria, Tanzania, Ghana, South Africa, Zambia and Congo etc.

We would like to cooperate with clients to develop long-term steady business relationships. We look forward to hearing from you in the near future. We welcome new and old customers to contact us.


ISO9001:2000&CE

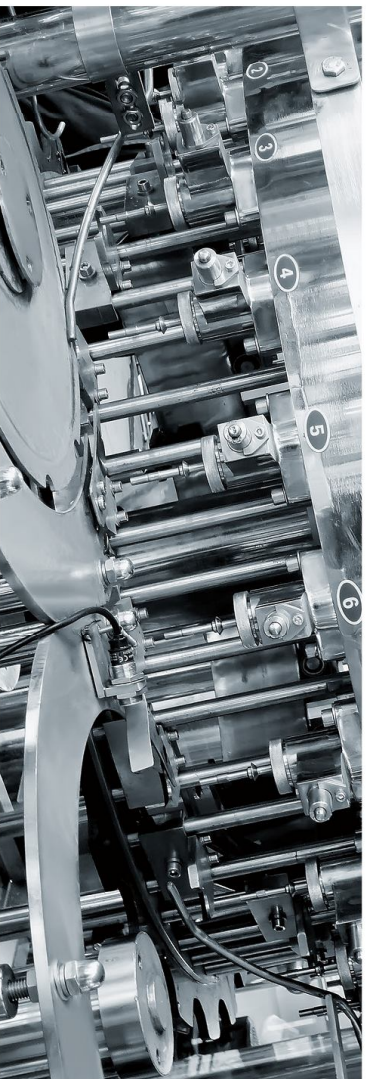


目录 CONTENTS

02-03	Processing Flow Chart 工作流程图
04	Non-Carbonated Drinks Production Line 不含气饮料生产线
05-07	Carbonated Drinks Production Line 含气饮料生产线
08-12	Juice/Tea Beverage Production Line 果汁、茶饮料生产线
13-14	Wine / Beer Filling And Packing Line (For Glass bottle) 啤酒灌装包装线
15	3 Gallon / 5 Gallon Barreled Water Production Line 3加仑、5加仑桶装水生产线
16-17	Pop-Top Can Filling And Packing Line 易拉罐灌装包装线
18	3L-10L Bottle Filling And Packing Line 3升-10升大瓶灌装包装线
19	Pouch Filling And Packing Machine 袋装包装机
20-23	Water Treatment System 水处理系统
24-25	Labeling Machine 套 / 贴标机
26	Packing Machine 包装机
27	Bottle Blow Moulding Machine 吹瓶机
28	Linear type filling line 直线式灌装生产线
29	Enterprise certificate 企业资质


1. 矿泉水整套生产设备 & 工艺 Mineral Water Production Line & Technique

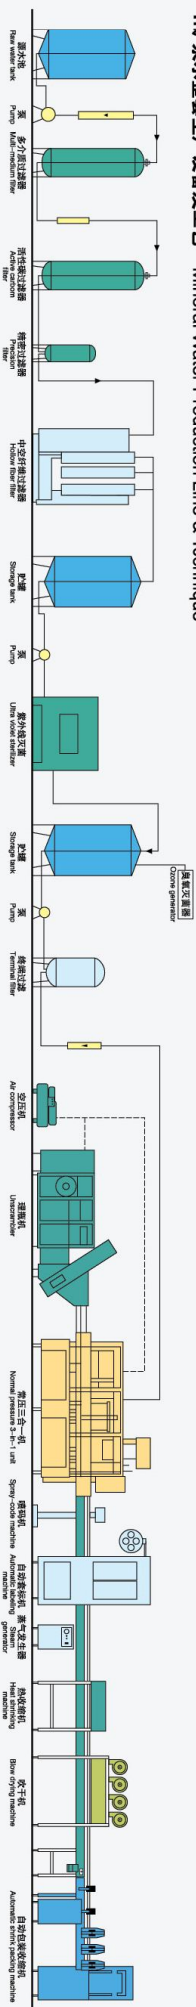


2. 纯净水整套生产设备 & 工艺 Pure Water Production Line & Technique

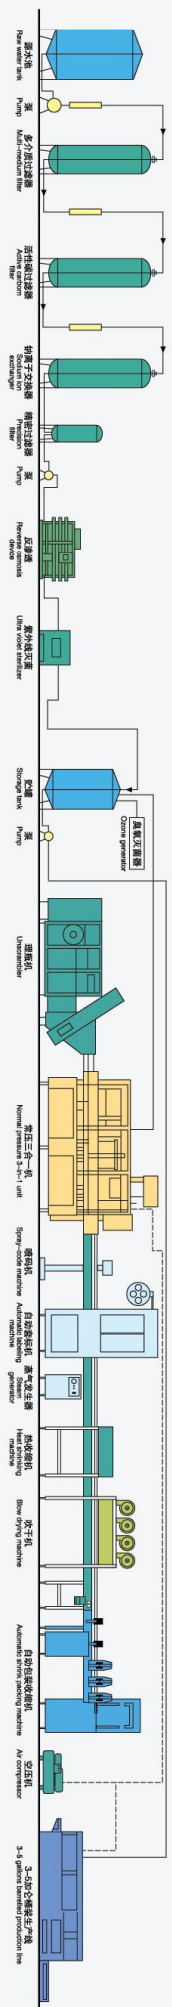


3. 碳酸饮料(含汽饮料)整套生产设备 & 工艺 Carbonated Drink Production Line & Technique

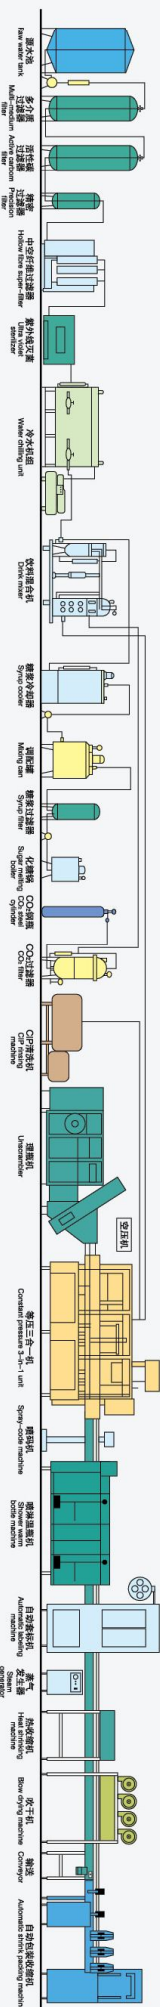

4. 果汁、果茶整套生产设备 & 工艺 Fruit Juice & Fruit Tea Production Line & Technique

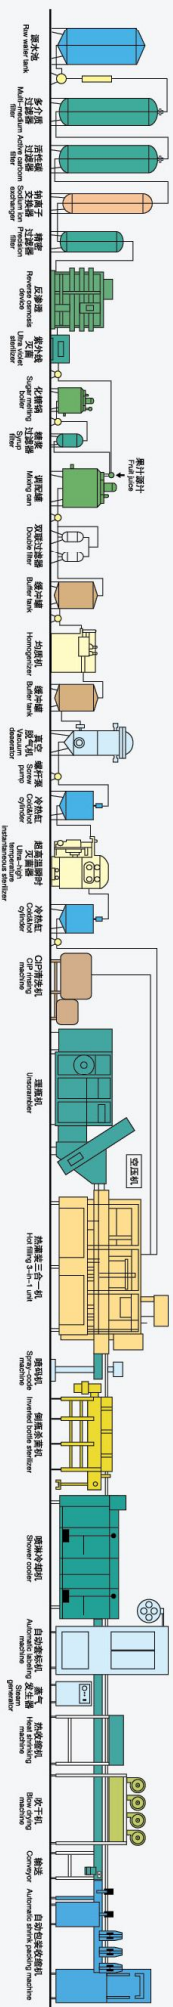

5. 茶饮料(乌龙茶、红茶、绿茶)整套生产设备 & 工艺 Tea Production Line & Technique

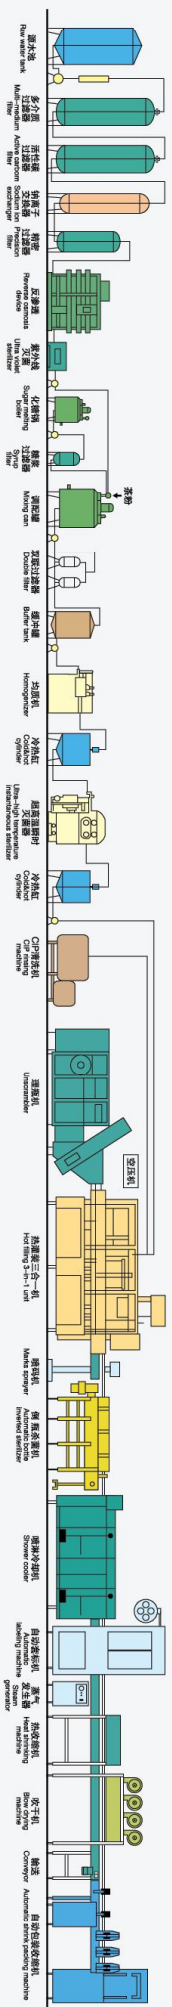

XGF 系列冲洗、灌装、旋盖三合一机

3 in 1 Monobloc Rinsing, Filling And Capping Machine



产品描述 Product Description

该机器冲洗、灌装、旋盖为一体的全自动多功能聚合机组，它适用于各种无气饮料、油醋、果酒、矿泉水、纯净水的自动冲洗、灌装、封口，该线设计独特、式样新颖、功能齐全、适应性强、操作使用方便、外形造型美观、自动化程度高，是目前最先进灌装设备。

Modern brand washing-filling-capping 3-in-1 machine is a set of equipment with high precision and speed to fill liquid. It adopts bottle-neck block technology, not only avoiding second pollution to the bottle-neck, but also realizing filling different specs of bottles in one equipment, which greatly improved commonality of this equipment. Production capacity is 1000 bottles to 30000 bottles per hour. Main-frame machine adopts frequency controlling electric motor, which is much convenient to adjust speed in scope of production capacity.




主要技术参数 Main Technical parameters

型号 Model	冲洗、灌装、旋盖头数 Heads of washing/filling/sealing	生产能力 (600ml) 瓶/时 Production capacity (bottle/hour)	适用瓶型规格 Suitable bottle diameter (mm)	喷冲压力 Spraying pressure (kg/cm ²)	主电机功率 Main motor power (kw)	外形尺寸 (长 x 宽 x 高) Overall dimension (LxWxH) (mm)	重量 (kg)
XGF16126	16-12-6	2000-4000			2.2kw	2400x1650x2500	2500
XGF18186	18-18-6	5000-7000			2.2kw	2600x1920x2550	3500
XGF24248	24-24-8	8000-12000			3kw	3100x2300x2800	4500
XGF323210	32-32-10	12000-15000	Φ=50-110=170	2-3	5.5kw	3800x2800x2900	6500
XGF404012	40-40-12	16000-20000			7.5kw	4600x2800x2900	8500
XGF505012	50-50-12	20000-24000			11kw	5450x3300x2900	9800
XGF606015	60-60-15	25000-30000			15kw	6500x4500x2900	12800

XGFD 系列冲洗等压灌装旋盖三合一机 (含气)

3 in 1 Monobloc Rinsing, Pressure Filling And Capping Machine

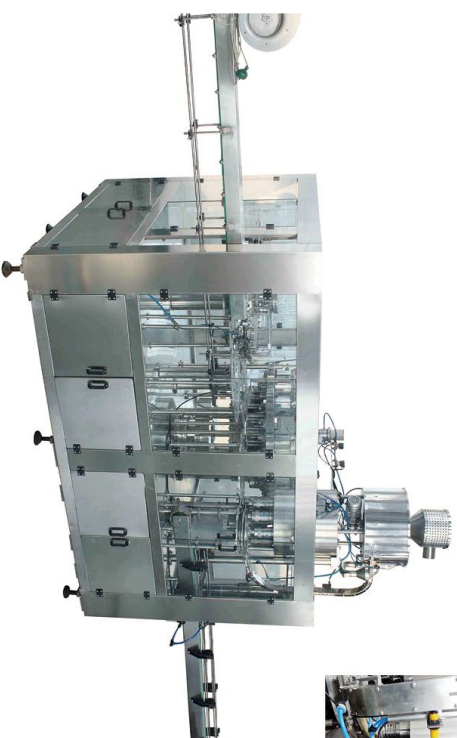

产品描述 Product Description

XGFD 型冲瓶、灌装、旋盖机组以引进国外先进的含气灌装技术是一台高效能的全自动液体包装设备。

该机适用于含气饮料的包装，该机具有以下特点：灌装缸、灌装阀等与物料直接接触的零部件均采用优质不锈钢或无毒材料制造，符合食品卫生要求；密封件采用耐高温橡胶，满足了用户高温消毒的工艺要求；采用了 PLC 可编程控制器，实现了从瓶子入机到包装完毕的全自动控制采用了变频调速控制，易于用户调整速度，满足了不同工艺对生产能力的要求；采用了等压灌装原理及流行的弹盖装置，确保了饮料品质，采用了先进的磁力离合调整片盖力矩装置，确保了封盖质量。



The series of Washing-filling-capping 3-in-1 machine for filling carbonated drink contains washing, filling and capping with complete automation, suitable for filling carbonated drink into polyester bottles and PET bottles. It can be used for all kinds of bottles. The bottleneck blocking makes the process of changing bottles easily by only adjusting the height of conveyor chain. The filling process adopts the micro-pressure technology, which makes filling process faster and more stable.

主要技术参数 Main Technical parameters

型号 Model	冲洗、灌装、旋盖头数 Heads of washing/filling/sealing	生产能力 (350ml) 瓶/时 Production capacity (bottle/hour)	适用瓶型规格 Suitable bottle diameter (mm)	灌装温度 Filling temperature (°C)	灌装形式 Filling type	喷瓶压力 Spraying pressure (MPa)	灌装压力 Filling pressure (MPa)	电机功率 Motor power (kw)	外形尺寸 (长 x 宽 x 高) Overall dimension (LxWxH) (mm)	重量 (kg)
XGF16126	16-12-6	2000-4000			等压		0.15-0.35	2.2+0.55+0.12	2300x1600x2500	2800
XGF18186	18-18-6	4000-6000			等压		0.15-0.35	2.2+0.55+0.18	2600x1920x2550	3550
XGF24248	24-24-8	8000-10000	Φ=50-100=170		等压		0.15-0.35	3+0.55+0.18	3100x2200x2800	4800
XGF32328	32-32-8	10000-12500	330-1500ml	0-5	平衡	0.2-0.25	0.2-0.4	5.5+0.55+0.18	3850x3000x2850	6800
XGF404010	40-40-10	12500-15000	Φ50-Φ110		平衡	0.2-0.25	0.2-0.4	5.5+0.55+0.18	4850x3800x2750	8500
XGF505012	50-50-12	16000-20000	H=160-340		平衡	0.2-0.25	0.2-0.4	7.5	5750x3550x2750	10500
XGF606015	60-60-15	20000-24000			平衡	0.2-0.25	0.2-0.4	15	6500x5000x2750	12800

QHS 系列饮料混合机 Mixing Machine For Carbonated Drink

产品描述 Product Description

本机是引进国内外最新技术开发研制而成，主要用于碳酸饮料的气液罐的混合加工，在同产品中处于领先地位。本机采用先进的气液混合装置，可将糖浆、饮料主剂、水、二氧化碳气体三者一次混合供灌装使用，也可用于稀释啤酒，啤酒充气以及汽酒等的生产，它具有工艺先进，混合充分，混合精度高，含气量高，结构紧凑，使用方便，适用于大、中、小型饮料，使用。

QHS 系列混合机是设计采用最新技术，用于碳酸饮料的气液罐的混合加工，在同产品中处于领先地位。本机采用先进的气液混合装置，可将糖浆、饮料主剂、水、二氧化碳气体三者一次混合供灌装使用，也可用于稀释啤酒，啤酒充气以及汽酒等的生产，它具有工艺先进，混合充分，混合精度高，含气量高，结构紧凑，使用方便，适用于大、中、小型饮料，使用。

QHS 系列混合机是设计采用最新技术，用于碳酸饮料的气液罐的混合加工，在同产品中处于领先地位。本机采用先进的气液混合装置，可将糖浆、饮料主剂、水、二氧化碳气体三者一次混合供灌装使用，也可用于稀释啤酒，啤酒充气以及汽酒等的生产，它具有工艺先进，混合充分，混合精度高，含气量高，结构紧凑，使用方便，适用于大、中、小型饮料，使用。

QHS 系列混合机是设计采用最新技术，用于碳酸饮料的气液罐的混合加工，在同产品中处于领先地位。本机采用先进的气液混合装置，可将糖浆、饮料主剂、水、二氧化碳气体三者一次混合供灌装使用，也可用于稀释啤酒，啤酒充气以及汽酒等的生产，它具有工艺先进，混合充分，混合精度高，含气量高，结构紧凑，使用方便，适用于大、中、小型饮料，使用。



主要技术参数 Main Technical parameters

型号 Model	生产能力 Production capacity	糖浆与水 范围 Mixing range	含气量 (CO ₂ H ₂ O 体积比) (GV) Gas contentin beverage	冷冻水入口 温度 (°C) Temperature in chilled water	饮料脱 水方式 Water deoxidization method	预氧化罐、糖浆罐 工作压力 Working pressure of pre-carbonation tank and syrup tank (MPa)	储存罐 工作压力 Working pressure (MPa)	功率 Power supply (kw)	外形尺寸 (长 x 宽 x 高) Overall dimension (LxWxH) (mm)	重量 (kg)
QHS-1500A	1000-1500	1.5-2.5	1.5-2.5	0-5°C	用一氧化氮气体 置换水中的氧气 Deoxidized by CO22	0.05-0.08	0.2-0.5	1.1	900x700x2000	约 500
QHS-3500A	2000-3500	1.5-2.5	1.5-2.5	0-5°C	用一氧化氮气体 置换水中的氧气 Deoxidized by CO22	0.05-0.08	0.2-0.5	1.5	1600x900x2100	约 650
QHS-3000	2000-3000	> 3.0	> 3.0	0-5°C	用一氧化氮气体 置换水中的氧气 Deoxidized by CO22	0.05-0.08	0.2-0.5	3.7	1600x1250x2100	约 1200
QHS-6000	4000-6000	> 3.0	> 3.0	0-5°C	用一氧化氮气体 置换水中的氧气 Deoxidized by CO22	0.05-0.08	0.2-0.5	5.2	2000x1200x2100	约 1800
QHS-7000	8000-9000	> 3.5	> 3.5	0-4°C	真空脱氧 Deoxidized by vacuum system	0.05 ~ - 0.06Mpa 糖浆罐 Syrup tank: - 0.05 ~ - 0.08Mpa	0.2-0.5	8.5	3200x2100x2500	约 2800
QHS-10000	10000-12000	> 3.5	> 3.5	0-4°C	真空脱氧 Deoxidized by vacuum system	0.05 ~ - 0.06Mpa 糖浆罐 Syrup tank: - 0.05 ~ - 0.08Mpa	0.2-0.5	11	3800x2000x2750	约 4800
QHS-15000	12000-16000	> 3.5	> 3.5	0-4°C	真空脱氧 Deoxidized by vacuum system	0.05 ~ - 0.06Mpa 糖浆罐 Syrup tank: - 0.05 ~ - 0.08Mpa	0.2-0.5	15	4300x2200x2550	约 6500

LSJ 连续式冷水机组 Water Chilling Machine

产品描述 Product Description

该机是采用美国谷轮压缩机全封闭压缩机机组及自动控制控制系统，蒸发器采用铜管板式换热器，可实现把水从常温快速连续冷却到5℃以下，并使水最终处于2-5℃(±2℃)的低温状态。是制造汽水、可乐、汽酒、鲜奶等行业不可缺少制冷设备。它具有制冷能力大、无泄露、自动化程度高等特点。

This unit adopts American Copland enclosed compressor, plate heat exchanger (brake welding) and auto control system, to realize fast cool down normal water to 5 °C , and control final water temperature within 2-5 °C (±2 °C). It is a chief chilling equipment to produce soda water, cola, sparkling wine and fresh milk. It has characteristic of large chilling capacity, no leakage and high automatic degree.



主要技术参数 Main Technical parameters

型号 Model	产水量 Output (m3/h)	制冷量 Chilling capacity (Kcal)	入水温度 Temp. of water inlet(°C)	出水温度 Temp. of water outlet(°C)	压缩机功率 Power of compressor(kw)	制冷剂 Refrigerant	冷却水出水温度 Temp. of chilling water(°C)	冷却水循环量 Flowrate chilling water(m3/h)
LSJ-1500	1-1.5m3/h	30000			10			20
LSJ-3000	3m3/h	60000			20			30
LSJ-5000	4-5m3/h	100000	<25°C	2-5°C	35	R22	<36	50
LSJ-7000	6-7m3/h	150000			50			60
LSJ-10000	8-10m3/h	210000			70			80

YLP 系列全自动旋转式理瓶机 Bottle Unscrambler

产品描述 Product Description

该全自动旋转式理瓶机引进国际先进技术，专门为冲洗灌装封盖三合一机设计的配套设备，由前瓶机将杂乱无章的空瓶子进行有序整理通过推瓶口的风力输送机，高速、高效、卫生地向前三合一机输送合格的瓶子，以满足高速灌装的需求，并提高了整线的生产效率。

YLP series rotary unscrambler is special designed as complete set for rinsel/filler/capper monobloc and with the latest international technology. The bottles are transferred through neck guided air conveyor to the monobloc after unscrambling from the unscrambler with fast, high efficiency and sanitation. It is satisfied for high speed filling request and also raise production efficiency of the whole line. The air conveyor can also be used for aseptic filling line after take some modification.




主要技术参数 Main Technical parameters

型号 Model	工位数 Work position	生产能力 production capacity (b/h)	气源压力 gas source pressure(MPa)	用气量 gas consuming volume(m3/min)	适用瓶型 suitable bottle type(mm)	主电机功率 main motor power(kw)	风机电功率 fan power(kw)	主机外形尺寸 dimension(mm)	整机重量 weight(kg)
YLP-100	16	12000			350-1200ml	Φ50-Φ90	1.5	Φ2056 × 1970	3500
YLP-200	18	18000		0.7	350-1250ml	H=150-290	2.2	Φ2650 × 2290	4200
YLP-300	21	18000		0.5	350-1250ml	H=150-290	5.5	Φ3200x2400	5200kg

XGFR 系列冲洗热灌装旋盖三合一机 3 in 1 Monobloc Rinsing, Hot Filling And Capping Machine

产品描述 Product Description

XGFR 系列全自动冲洗、灌装、旋盖三合一机引进意大利技术，精工制造，可在线无罐灌装，增加恒量系统，更换部分附件，可适应耐热 PET 瓶、果汁、茶、饮料等热灌装工艺要求。该机组技术先进、占地面积小、结构紧凑，适用于 PET 瓶装各种不含气饮料（矿泉水、纯净水、蒸馏水、果汁、茶、饮料等）常温或热灌装，也使用翻等液体的清洗、灌装、封口。是目前最先进的饮料灌装设备。

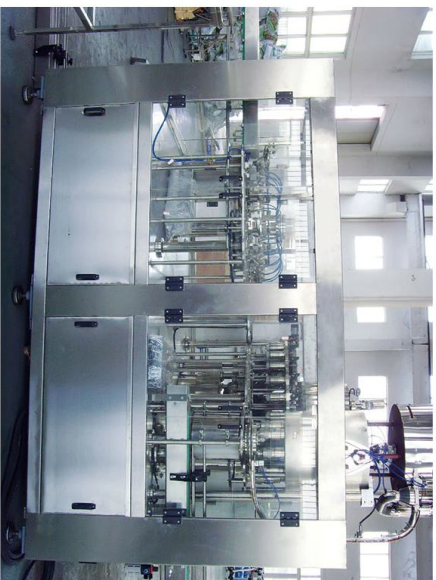

The material of the bottles can be PET, glass and so on. The function of fluent and fast filling action, high filling precision, reliable capping and low material loss makes it effectively prevent secondary pollution of the neck with high automation in the whole process. It can achieve the replacement of different bottles only by exchanging equivalent parts.

This system can also form complete set of production line with other related systems, providing proposals for full-set of hot filling. Satisfying different customers' different requirements about the production capacity: from 3000-30000b/h, Juice beverage filling, tea beverage filling and fruit beverage filling etc.

主要技术参数 Main Technical parameters

型号 Model	Heads of washing, filling, sealing	Production capacity/bottle/ hour	Suitable bottle height	Spraying pressure	Total Power	外形尺寸 (mm)	重量 Weight
XGFR16126	16-12-6	3000-4000	H=170-320		1.5+0.37	2300×1680×265	2600
XGFR18186	18-18-6	5000-7000			2.2+0.37	2500×1760×2650	3500
XGFR24248	24-24-8	8000-12000			3+0.45+0.25	3100×2100×2850	4650
XGFR32328	32-32-8	12000-15000	Φ=50-100	0.25-0.3	5.5	3800×2800×2850	6800
XGFR404010	40-40-10	16000-18000	330 - 150mm		7.5	4000×3300×3400	8500
XGFR484812	48-48-12	20000-24000			11	4850×3650×3300	1000
XGFR606015	60-60-15	24000-28000			15	6500×5400×3500	12500

XGGR 系列含果肉饮料四合一灌装机 4 in 1 Automatic Juice Fruit Pulp Filling Machine

产品描述 Product Description

本设备适用于大瓶口和小瓶口 PET 瓶灌装，含果肉饮料进行 2 次灌装完成，集冲瓶、果肉瓶、果汁灌装、旋盖于一体，果肉灌装均匀，产量 2000-20000 瓶/时由用户自选，是当今最理想的果肉饮料灌装设备。The series equipment is used for the production of green tea, black tea and fruit juice and Filling Pulp. It integrates Washing, Pulp Filling, Juice Filling, Capping together. The design is scientific and reasonable, its appearance is beautiful, operation and maintenance is convenient.



- Features:
1. High speed filling valve, guarantees liquid has precise level and no waste is incurred
 2. The advanced programmed controller (PLC) is adopted to control the machine to run automatically.

主要技术参数 Main Technical parameters


型号 Model	XGGR1818186	XGGR2424248	XGGR32323210
冲洗、灌装、旋盖头数 The heads of washing, filling and capping	18-18-18-6	24-24-24-8	32-32-32-10
生产能力 (5000ml) 瓶 / 时 Capacity(bph): (5000ml/bottle)	5000-6000	8000-10000	10000-12000
功率 Power(kw)	Total motor 3.37kw	Total motor 4.45kw	Total motor 5.5kw
外形尺寸 Dimensions(mm)(LxVxH)	3500x1860x2550	4200x2100x2550	5000x2100x2850

SRD 倒瓶杀菌机 Bottle Overturn Sterilizer

产品描述 Product Description

本机主要适用于茶、果汁饮料经热灌装封盖后，对瓶口、瓶盖未能被高温物料接触的空隙部分进行杀菌。灌装封盖后的产品，经本机自动翻转动 90° 将瓶放平，通过物料温度为瓶盖内壁进行杀菌，进入喷淋冷却机，该机采用进口传动链，平稳可靠，对瓶身无损坏，传达速度无级调速。

It's suitable for tea fruit juice drinks, mainly used for the sterilization of bottle mouths and caps which couldn't be touched by high-temperature material after hot-filling and capping, the capped bottles are inverted by 90 degrees, automatically by this machine and so bottles are put even. It sterilizes the caps inner wall and then stand vertical automatically, then enters shower cooling machine. It adopts imported transmission chain, steady and reliable, do no harm to bottle, stepless speed adjusting

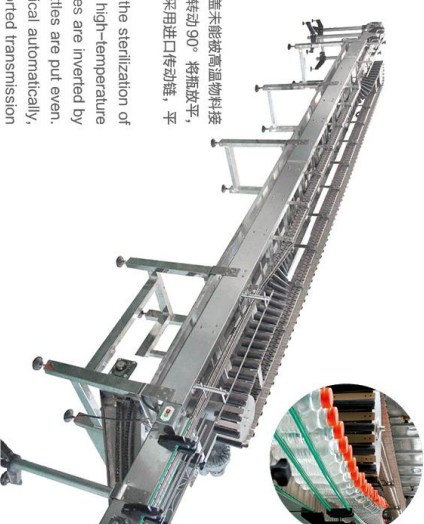


ZJ-1.5 螺旋榨汁机 Juice Screw Extractor

产品描述 Product Description

该机适用于葡萄、番荔枝、果类及各种蔬菜类的榨汁，其榨汁效率的压缩比较大，并可根据不同的物料调整螺纹与滚筒的间隙。

1. 单螺杆、双螺杆形式
2. 渣汁自动分离

The machine is suitable for extracting juice from grape, tomato, fruits and vegetable. Its range of extracting ratio is very wide. The space between screw stem and cylinder can be adjusted according to different material extracted.

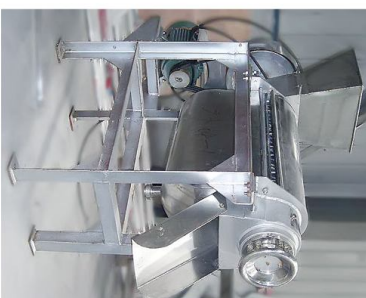

主要技术参数 Main Technical parameters

型号 Model	生产能力 Production capacity	配用功率 Power(kw)	外形尺寸 Overall dimension	重量 Weight(kg)
ZJ-1.5	0.5-1.5	4	1560 × 450 × 1340	450

GJB 系列高压均质机 Homogenizer

产品描述 Product Description

整个机器用抛光不锈钢制成的外壳罩住，所有仪表均固定在罩上，外表光洁、精致美观，适用与现代化工业生产，在乳品食品制药等行业得到广泛应用。



Pressure through an adjustable current-limiting gap process, the formation of loss of pressure expansion, explosion, shear, combined effect of high-speed collision, the particles and liquid droplets shatter into very small size, while creating an ideal solution or dispersion of emulsion. This process sets ultrasonic mill, colloid mill, ball mill, jet principle and other functions in one machine. Product stability, consistency, mixed, and easy absorption, nutritional value, shelf life, flavor, color, security activities are realized in the homogeneous process. Widely used in food, dairy, beverage, pharmaceutical, fine chemicals and bio-technology and other fields of production, scientific research and technological development.

主要技术参数 Main Technical parameters

Model	GJB	Flow	0.2-12t/h
Rated Pressure	25-100Mpa	Medium temperature	<80 oC
Medium viscosity	<=0.2Pa.s	Particle size	0.1-0.2Micron
Ring temperature	<150 oC	Average<1Micron	
Motor power	1.1-110kw	Homogenizing valve material	Stellite
Flow medium parts	304, 316L	Medium	Liquid state (milk, juice, oil, etc.)
Noise	<=80db		

BST 板式超高温杀菌机组
Ultra High Temperature Plate Sterilizer

产品描述 Product Description

板式超高温瞬时杀菌系统为智能化 PLC 自动控制，产量有 3-10 吨/小时可供选择。针对饮料低温、中温、高温、热灌装工艺要求，系统将板片工作段分为无菌工作段和一般工作段，选用七段换热机组的工艺设计，有效的利用热源，将能耗降到最低，完善的 CIP 和 SIP 系统设计，满足生产设备的清洗和终灌要求。物料杀菌升温加热和灌装出口温度的调整，均采用过热水作介质，温控精度高。

The BST plate-type sterilizer equipment is specially designed for dairy products, fruit juice, beverage and similar liquid material as one-stage sterilization equipment. It's an ideal equipment for material to reach the aim of prolonging the time of preserving freshness through sterilization and cooling. According to the various technology request from customers for heating, sterilization, heat-preservation, cooling of various material, we can design various process combination to meet the technological standard and make the equipment have all kinds of safeguard measures, high temperature alarm and reflux meantime, we can configure high accuracy automatic control system according to the requirement of customers.

1. production capacity: 1-10T/H
2. sterilization temperature: 85-137 centigrade.


主要技术参数 Main Technical parameters

Model	BST-1	BST-2	BST-3	BST-4	BST-5
Product capacity T/h	1	2	3	4	5
Heat exchanging area m ²	16	26	38	46	56
Material inlet temperature °C	5	5	5	5	5
Sterilizing temperature	137	137	137	137	137
137Wankkeeping times	10-15	10-15	10-15	10-15	10-15
Ice water cos T/h	3	4	6	8	12
Joint size mm	φ 25	φ 38	φ 38	φ 51	φ 51
Weight kg	980	1080	1160	1350	1680
Size mm	1500 * 1500 * 2000	1900 * 1800 * 2200	1900 * 1800 * 2200	1900 * 1800 * 2200	2600 * 2200 * 2500
power kw	3	4	5	6	6

UHT 超高温瞬时灭菌器
High Temperature Flash Sterilizer

主要技术参数 Main Technical parameters

型号 Model	UHT-1	UHT-2	UHT-4
处理能力 Treatment capacity	0.7-1t/h	1.5-2t/h	3-4t/h
灭菌温度 Sterilizing temp.	115-135 degree °C	115-175 degree °C	
加热蒸汽压力 Steam pressure		<0.77Mpa	
蒸汽耗用量 Steam consumption	60kg/h	120kg/h	240kg/h
出料温度 Outlet temp.		65-95 degree °C	
电动机功率 Motor power	1.5kw	2.2kw	3kw
外形尺寸 Overall dimension	800x700x1500mm	850x750x1600mm	1000x900x1900mm
设备重量 Weight	appr. 420kg	appr. 480kg	appr. 620kg

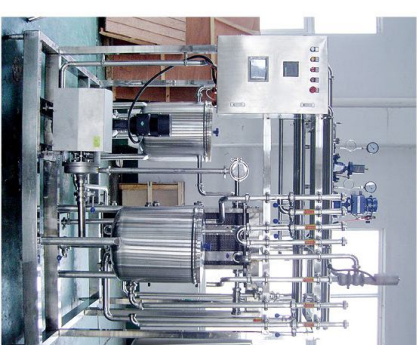

CS 系列卫生级调配缸 Sterile Storage Tank


产品描述 Product Description

该调配罐采用 SUS304 不锈钢制造，严格按照食品卫生标准要求设计、制造，可用于多种物料液体的调配混合和贮存，配备强力高速搅拌机能使物料迅速高效混合，该设备可保温，（夹层）两种，本公司可根据用户要求特殊设计制造，可配置下列附件装置：温度计、卫生人孔、CUP 清洗装置、显示、无菌取样口、无氧呼吸孔等。

Stainless steel sterile cistern is widely used in food, medicine, chemical industry and water treatment works, in water treatment process has played precipitation, buffer pressure, prevent water pollution, storage water functions.

Second, performance characteristics

- 1, sterile water tank using new craft technique manufacturing, internal without tensile siren, box wall without right Angle, have no dirt, easy cleaning, accord with international general recognition of GMP hygiene standards.
- 2, material USES SUS304, 316 stainless steel food-grade, strong corrosion resistance.
- 3, sterile water tank design is reasonable, pressure evenly, wind load is small, good sealing, thoroughly eliminate the dust harmful substances in the air and small animals, ensure water invasion from secondary pollution.

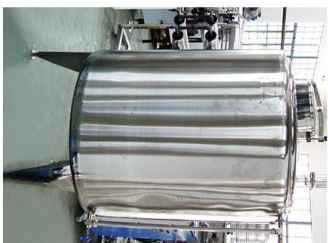

LRG 系列冷热缸 Juice Mixing Tank


产品描述 Product Description

该设备适用于液体物料的低温，高温状态下的搅拌混合及加热、冷却、保温杀菌处理或贮存等，是饮料生产过程中的设备之一。

This equipment is suitable for heating, cooling, insulating and mixing liquids under low or high temperature, it is one of necessary equipment on drink producing line.

The mixing tank has three layers as below

- 1, inner pot material: 316L with high grade of antirust stainless steel, Thickness is 3mm.
- 2, Mirror Polishing: Precision of polishing is Ra0.8um
- 3, Outer pot: 304 stainless steel. Thickness is 1.5mm.

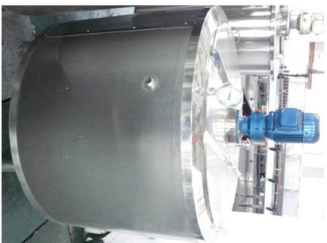

CIP 清洗机 CIP Cleaning Machine

产品描述 Product Description

This equipment mainly consists of alkali tank, clean water tank, cut-off valve and centrifugal pump, etc.

Alkali tank and the plisher

Alkali tank used to store cleaning fluid, in accordance with the cleaning process may require the preparation of cleaning liquid ingredients, concentration, and cans through the base of steam heating coil, cleaning fluid can be heated to the required temperature, atmospheric pressure is a tank containers. Made with stainless steel plate, a cylinder temperature thermometer, you can display the temperature in the corresponding tank, a cylinder under the output interface (that is the outlet of centrifugal pumps).





啤酒灌装包装线 Wine / Beer Filling And Packing Line (For Glass bottle)



ISO9001:2000 & CE

PXGFD 玻璃啤酒冲洗灌装压盖三合一机

3in1 monobloc rinsing, filling and capping machine for glass bottle beer/wine.

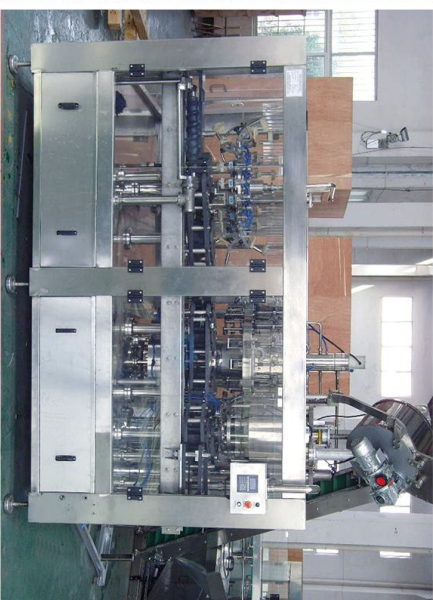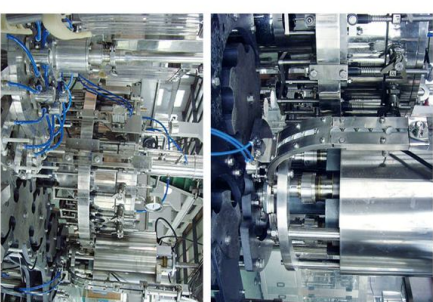

产品描述 Product Description

本系列产品采用当今国际流行的“二次抽真空与高压喷射”技术，最大限度降低啤酒含氧量，大幅度提升啤酒口感；精确压力控制和玻璃瓶自动检测功能，更确保啤酒灌装设备的出品时刻保持完美品质。该设备是引进德国技术，结合我国啤酒生产行业的特点设计开发的啤酒无氧灌装设备，本机具有优良的运行可靠性，完美的冲洗、灌装、压盖、消毒杀菌等功能，实现无氧啤酒在无菌的环境中灌入无氧容器中，产量从 2000 至 20000 瓶每小时。

Description of the product: The PXGFD series of 3in1 monobloc rinsing, vacuum filling, sealing machine adopts advanced technologies of double evacuations before filling and high pressure hot water injection system after filling. These technologies remarkably reduce oxygen content in bottled beer, improve taste of beer much. They have been widely used in modern beer industry in the world.

主要技术参数 Main Technical parameters

型号 Model	PXGFD18186	PXGFD24248	PXGFD32328	PXGFD404010	PXGFD505012
产量 Capacity (B/H)	3000-4000	5000-6000	7000-8000	8000-9000	9000-11000
冲洗, 灌装, 压盖头数 Heads of rinsing, filling&capping	18-18-6	24-24-8	32-32-8	40-40-10	50-50-12
瓶子高度 Suitable bottle height(mm)			160-340		
瓶子直径 Suitable bottle diameter(mm)			φ50-φ100		
冲洗水压 Wash water pressure(Mpa)			0.25-0.3		
灌装形式 Filling way	等压灌装 & 二次抽真空 Pressure equally filling&Two times vacuumized				
灌装温度 Filling temperature(℃)			0-5		
灌装压力 Filling pressure(Mpa)			0.15-0.5		
主电机功率 Main power(kw)	3	4	7.5	11	
总功率 Total power(kw)	3.18	4.18	7.68		
外形尺寸 Overall dimensions(mm)	3010×2010×3260	3280×2420×3200	4430×2890×3200	4650×3200×3200	4967×3846×3200
重量 Weight(kg)	3800	5000	6800	8800	11000



QGF 系列全自动桶装生产线

Full Automatic 3 Gallon / 5 Gallon Barreled Water Production Line



产品描述 Product Description

封口三部分组成。洗瓶机采用多道洗涤液喷

线均由自动喷淋、消毒、灌装、压盖、计数和输出。真正功能齐全、设计新颖、自动化程度高等特点。是集机、电、气于一体的新型饮用饮水桶装设备。

This filling line specially produces 5 gallons bottled drinking water, whose types(bh)are: 100 type, 200 type, 300 type, 450 type, 600 type, 900 type, 1200 type and 2000 type. It integrates bottle washer, filter and sealer into one unit in order to achieve the purpose of multiple injections of washing and sterilizing by means of liquid washing and heating aereused in bottle washer. Washing solution can be reused circularly. The sealer can seal bottle caps automatically. This line equips with water spraying device to sterilize caps of bottles in order to ensure those caps are aseptic and healthy, also this line can automatically carry out bottle feeding, washing, sterilizing, filling, capping, counting and products discharging. It is a new kind of bottled water auto-producing line which integrates mechanism, electricity and pneumatics technologies together.

and pneumatics technologies together.

Model	Filling heads	Volume (L)	Barrel size (mm)	(桶 / 桶) Capa (B/r)
-------	---------------	------------	------------------	-----------------------

QGF-300	2	18.9	Φ270×490	200-2
---------	---	------	----------	-------

QGF-450	3	18.9	Φ270
QGF-600	4	18.9	Φ270

QG-F-900	8	18.9	Φ270x490	900	0.6	2.2	8.5	380V/50Hz	2200x1860x2100 不含清洗	7500
QG-F-1200	12	18.9	Φ270x490	1200	0.6	3	8.5	380V/50Hz	2560x2350x2750 不含清洗	9500
QG-F-2000	16	18.9	Φ270x490	2000	0.6	4.5	8.5	380V/50Hz	3100x2800x2750 不含清洗	11800



YGF 易拉罐灌装封罐机 (不含气)

3in1 Monobloc Tin Can Rinsing, Filling And Seaming Machine For Non-Gas Beverage



产品描述 Product Description

本系列产品是引进瑞士灌装封罐技术，经消化吸收后，设计制造的易拉罐灌装，封罐一体设备。YGF 系列机适用于不含气饮料的常温，高温灌装、封罐，产量从 1500 至 9000 罐每小时。

YGF series of can filling and sealing monobloc machine, whose technologies was introduced from SWEDEN, is specially applicable for filling & seaming non carbonated drink into can at room temperature or high temperature. Capacity of this series of machine is from 1500 to 9000 can per hour based on 330ml can.




主要技术参数 Main Technical parameters

型号 Model	YGF-12-1	YGF-18-4	YXGF-12-12-1	YXGF-18-18-4
产量 Capacity (can/Hour)	1500-3000	5000-9000	1500-3000	5000-9000
适用罐容量 Suitable can size (ml)	150ml-500ml			
罐型 Can size	200/202/206/209			
灌装头数 Heads of filling	12	18	12	18
封口头数 Heads of sealing	1	4	1	4
冲洗头数 Heads of washing	1	4	12	18
灌装方式 Filling way	微负压 Negative pressure			
灌装温度 Filling temperature(℃)	常温或热灌装 65℃-95℃	Normal temp or 65-95℃	C	
供应电源 Power source specification	AC380V/50HZ			
功率 Power (kw)	2.2	4	3	5.5
外形尺寸 Overall dimension(mm)	2200x1600x2200	2500x2000x2350	2850x1800x2200	3200x2100x2350
重量 Weight(kg)	2500	3800	2850	4200

YGFD 易拉罐清洗灌装封罐机 (含气)

2in1 Monobloc Aluminum Can Filling And Seaming Machine For Carbonated Beverage

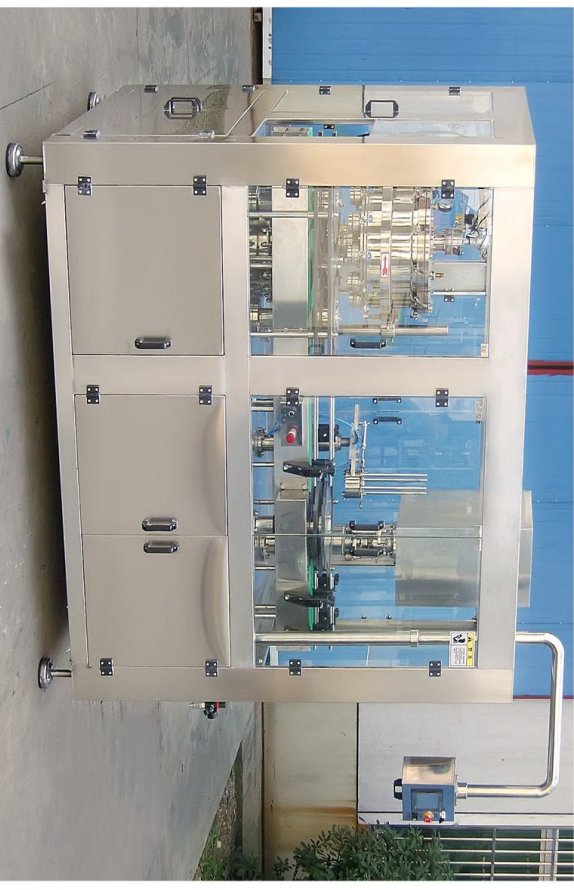

产品描述 Product Description

本系列产品是引进瑞士灌装封罐技术，经消化吸收后，设计制造的易拉，封罐一体设备。YGFD 系列机型适用于碳酸饮料，啤酒的灌装封罐，产量从 2000 至 9000 罐每小时。

YGFD series of can filling and sealing monobloc machine, whose technology was introduced from SWEDEN, is specially applicable for aluminum can balanced filling and sealing for carbonated drink and beer. Capacity of this is from 2000 to 9000 can per hour, based on 330ml can.



主要技术参数 Main Technical parameters

型号 Model	YGFD12-1	YGFD18-4
产量 Capacity (can/Hour)	1500-3000	5000-9000
适用罐容量 Suitable can size (ml)	150ml-500ml	
罐型 Can size	200/202/206/209	
灌装头数 Heads of filling	12	18
封口头数 Heads of sealing	1	4
冲洗头数 Heads of washing	1	
灌装方式 Filling way	等压灌装 Balanced pressure filling	
灌装温度 Filling temperature (℃)	0-5℃	
供应电源 Power source specification	AC380V/50HZ	
功率 Power (kw)	2.2	4
外形尺寸 Overall dimension(mm)	2200x1600x2200	2500x2000x2350
重量 Weight(kg)	2650	4200

ZS5L 系列大瓶水 (3-10L) 直线式冲洗, 灌装, 封口生产线 Full Automatic 3L-10L Bottle Filling Line

产品描述 Product Description

该生产线是专供塑料桶清洗、灌装、封盖的生产设备。由于该生产线引进了欧洲国家先进和成熟技术具有整机自动化程度高、适应性强、操作方便、安全性能好等优点, 其先进性在国内同行业同类产品处于领先地位。该设备适用于自动灌装 3-10L 纯水的设备, 使用各种异型瓶, 灌装量连续可调, 其技术水平领先于国内同行业同类产品

Introduction:

ZS5L series Linear Filling Line is produced by adopting international and domestic advanced technology. It is one kind of wide-used, high-automatic, operation reliable and convenient filling line. It is specially designed for 3L-10L big bottle. It can be used to fill all kinds of mineral water, pure water liquid without grains and viscosity, which can satisfy different filling requirement of different users.

Advantages:

1. It is aerodynamic and controlled by P.L.C.
2. All the filling heads work at the same time. It has bottle-gripping device to make sure 100% filling accuracy rate. It also has intellectualized protection programme control.
3. This machine is of constant pressure filling, it has no special Requirement to user's tank. It adopts closed type liquid tank and fixes with liquid level control system.

This advanced technology improves production efficiency highly and solve the leaking problem of other models of filling machines as well.



半自动油灌装压盖机 Semi-Automatic Oil Filling And Capping Machine

产品描述 Product Description

- 1、该半自动油类灌装生产线用于食用油、饮料、润滑油、药液、化工产品等粘液体的定量灌装;
- 2、本机采用柱塞式自动灌装, 适应于各种瓶型, 活塞式定量原理, 定量连续可调计量准确功能齐全, 适应性强;
- 3、气动驱动, 无滴漏现象;
- 4、半自动化控制;
- 5、光电感应自动压盖机;
- 6、机械防滴漏。



配置: 双头半自动灌装机+2米输送带+自动感应压盖机
特点: 整机组合价格低, 减少劳动强度, 提高工作效率。
This machine adopts piston filling quantitative theory, two-speed control process, slow down after to prevent liquid spills, leak-proof filling nozzle to ensure clean filling process. Reasonable design, convenient operation, steel tube material and access to pipes made of stainless steel manufacturing, embolization nylon material, meet the health requirements. Is widely used in vegetable oil, lubricating oil, beverage, chemical products such as mucous filling the body

主要技术参数 Main Technical parameters	
Model	FY-2
Capacity	400 bucket/hour
Power	0.3kw
Pressure	0.2-0.35 Mpa



DF(A) 异型袋灌装封口机 Special-Shaped Pouch Filling And Seaming Machine

产品描述 Product Description

成型袋无气加压灌是目前国际包装行业流行的液体包装形式, 具有包装形式新颖, 造型多样, 计量可靠, 封合牢固, 使用方便, 包装材料成本低等优点, 广泛应用于乳制品牛奶、酸奶、乳酸饮料等)、调味品(酱油、食用油等)、饮料、矿泉水、洗涤剂用品、酒类等在无气状态下的包装避免二次污染。
本机采用进口计算机专用控制器及进口气动装置实现定量灌装、自动封口、自动落袋。

DF(A) series automatic liquid hot-filling machine is suitable for fruit juice, milk, jelly, tea drinks, flavoring water, icelolly, yogurt, soymilk, Japan tofu, milk, beverage, alcohol, liquid soap etc that need hot-filling. It also can be used for normal temperature filling. With advantages of small size, easy operation, energy saving, easy maintenance etc, it's the best choice for various shapes bag packing.



DF(A) series include three models of DF(A)-8 and DF(A)-4 and DF(A)-4B to satisfy customer's different needs.
DF(A)-8 with 8 filling nozzles, speed 2800bags per hour. Touch screen PLC computer operation system. 1-2 labour operation.
DF(A)-4 with 4 filling nozzles, speed 1800bags per hour. Germany Siemens controller. 1 labour operation.
DF(A)-4B with 4 filling nozzles, speed 1000bags per hour. Touch screen PLC computer operation system. 1 labour operation.

DF(B) 常规袋灌装封口机 Normal Shaped Pouch Filling And Seaming Machine

产品描述 Product Description

本机广泛应用于牛奶、豆奶、各种饮料、酱油、醋、酒等各种液体的单翼乙烯薄膜包装, 能自动进行整外线纹, 料袋成型, 日期打印, 定量灌装, 封合切断一次完成, 整机采用不锈钢结构, 达到国际卫生标准。该机性能平稳可靠, 操作简便, 故障率低。得到了国内外客户的一致好评。

This series is widely used in the film packing of milk, soy milk, all kinds of drinks, soy vinegar, yellow wine etc, all packing procedures: ultraviolet ray sterilization, molding of bags, print of dates, filling with fixed quantity, sealing and cutting and numeration, all components are made of stainless steels and are designed to meet state hygienic standard. A and B model adopt single-layer polyethylene film while C model are categorized as middle sealing side sealing and photo-electric detection.



主要技术参数 Main Technical parameters			
Model	DF(B)-1000A	DF(B)-1000B	DC-DF(B)1000C
Capacity	1500-2200bags/h	1500-2200bags/h	1500bags/h
Volume	200ml-500ml	300ml-1000ml	200-1000ml
Power	220V/380V 1.8kw	220V/380V 1.8kw	220V/380V 1.8kw
Film Width	320mm/240mm	320mm/380mm	320mm/240mm

水处理系统

Water treatment equipments



产品描述 Product Description

Silica sand filter, precision, fiber active carbon filter, Sodium-ion exchanger, hollow fiber filter, UV sterilizer ozone generator and other equipments' treating capacity is 2-30 ton/h. It can effectively get rid of muddy organic, iron, manganese and oxide, filter suspended substance, colloid, remanede oxygen of micro-organism and some of height-metal ion in the water. This water treatment equipment can also reduce hardness of water to make all specifications of the water quality fully meet the state fresh water standards, even that of standard of mineral water.

NL 系列钠离子交换器 Sodium Ions Filter

产品描述 Product Description

此过滤器用于降低水质硬度，经钠离子交换器处理后水中总硬度降低至 0.04 毫克当量 / 升以下
The exchanging device is for reducing the hardness of hard water. Raw water goes through the exchanger from top to bottom, to be softened by the sodium ion-exchanger inside the device. The positive ions of magnesium and calcium are exchanged with that of sodium. Then the raw water becomes soft water containing very few of ions of magnesium and calcium. The soft water can be used for feeding water of boiler and for some industrial uses. Due to its high dislodging ability in water, sodium ions will not form hard sediment in the boiler and can be easily removed. Raw water shall be settled with almost on suspended before coming into the ionexchanging device. After being softened on the device, the water's hardness shall be less than 0.03mg/L.



JML 系列精密过滤器 Precision Filter

产品描述 Product Description

该系列过滤器采用高分子材料制成微孔滤膜为过滤介质，它主要用于超纯水、墨水、啤酒饮料等过滤除菌。它具有过滤效率高、质量好、结构紧凑、便于清洗等特点，是中小型饮料厂理想的过滤设备。
This filter adopts micro-hole filtering film made of high polymer material. It is mainly used to filter super water, distilled water mineral water, beer, drink and so on. It has features of high efficiency in filtering, good quality, compact structure, easy cleaning and it is ideal filter equipment for small and middle scale drink factories.



JDL 系列多介质过滤器 Micropore Filter

产品描述 Product Description

水中溶解了各种物质，要想得到纯净水，就必须对水进行处理，最基本的方法，就是用各种介质来过滤水中杂质。当采用不同的过滤介质，就可以得到不同的过滤效果，当装填锰砂时，可有效的除去水中的铁、锰等混合物，当装填石英砂、无烟煤时，可有效的除去水中的混杂物及胶体等，当装填活性炭时，可有效的除去水中的异味和余氯。它广泛应用于药等行业的源水的初及净化处理，可使水透明，饮用甘醇，它具有设备占地面积小、操作维护简便、容量重大、可以反冲洗，选用优质不锈钢制造，符合食品卫生要求。
The filtering elements of JDL filter is sintered with low-pressure high polymer PE and PAC. It can get rid of the solution organic substance, and part of microorganism, pigment, bad smell in water, but also can remove part of harmful metal ion, such as Zn, Fe, Cd, Hg and other harmful substance, such as chloric-phenol and As. The filter not only can clean tap water and polluted water, but also is used to filter and sterilize wine, vinegar, edible oil, syrup, beer and so on.



GHT 系列活性炭过滤器 Active Carbon Filter

产品描述 Product Description

本设备适用于饮料用水的净化处理，能去除水中异味、臭味和铅、镉、铁、锰、铬等重金属物质，去除氯化物、硫化物、余氯等高分子有机化合物，是生活饮用水、食品、饮料、制药、化学等行业净化水的理想设备。
This filter is designed for drinking water treatment. It can clear away alien colour and foreign substance from the water and can remove heavy metal such as mercury, lead, cadmium, zinc, iron, manganese and chromium, and hydrogenate, sulphide remaining chloride and so on. The filter is the ideal equipment for drinking water, foodstuff, beverage, pharmaceutical and chemical industries



WKL 微孔过滤 Micropore Filter

产品描述 Product Description

该微孔过滤器的滤芯采用低压超高分子 PE、PAC 材料烧结而成，它不仅去除水中不溶性的有机杂质，去除水中部分微生物、色素、臭味，而且还可去除水中部分有毒的金属离子，如镉、铁、铜、汞及对人体有害的氯、砷等物质。它既适用于自来水的净化及受污染的水质净化，也适用于白酒、药酒、葡萄酒、酱油、食用油、糖浆、啤酒等除菌澄清过滤。
The filtering elements of WKL filter is sintered with low-pressure high polymer PE and PAC. It can get rid of the solution organic substance, and part of microorganism, pigment, bad smell in water, but also can remove part of harmful metal ion, such as Zn, Fe, Cd, Hg and other harmful substance, such as chloric-phenol and As. The filter not only can clean tap water and polluted water, but also is used to filter and sterilize wine, vinegar, edible oil, syrup, beer and so on.



RO 一级反渗透纯水装置 Reverse Osmosis Device



产品描述 Product Description

该装置的核心部件水泵采用中国南方水泵。反渗透膜采用世界著名的美国海德能公司的反渗透膜，带有全套的膜清洗装置，结构简单，操作方便，技术水平高。在源水电导率小于250us/cm的条件下，经本装置处理后的水，水质指标可100%的达到国家纯净水（大空水）的标准。本产品是国内目前最理想的反渗透水处理设备。


This setup adopts reverse osmosis membrane of Hydranautics as core-block, having a good rate of desalination; adopting superb high pressure pump, which is simple in structure and easy to operate. Under the condition of that raw waters electrical conductivity is below 300us/cm, water being dealt by this setup, water quality index could absolutely reach the standard of purified water regulated by the country. This product, at present is the optimal water-dealing equipment at home.



主要技术参数 Main Technical parameters

Model	RO-1000	RO-2000	RO-3000	RO-4000	RO-5000	RO-10000
m3/h Production Capacity	1T/H	2T/H	3T/H	4T/H	5T/H	10T/H
Power ke	1.87	2.05	2.57	2.75	3.25	7.5
Desalt rate	98%					
Rate of recovery	50-60%					

YF 中空纤维超滤装置 Hollow Fibre Supper Filter

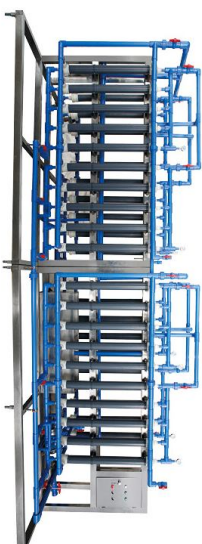

产品描述 Product Description

本厂生产中空纤维超滤组件采用螺纹连接形式，主要以分离有机大分子物质、胶体、超微粒子、细菌等为主，对杂质过滤、澄清、除菌和大分子物质的浓缩等具有非常卓越的效果。

超滤装置分超滤型和浓缩型两种类型，纯水产量从0.3-20m³/h 各类规格齐全，本公司超滤产品已在对各类水源、饮料、酱油、醋、酒类等澄清、截留、医药、电子工业用纯水、超纯水制备；蛋白质、酶制剂等高分子物质的精制、浓缩等方面取得成功应用。一般超滤装置需另配泵和化学清洗装置。

YF type inner pressure type ultra-filtration device is made of inner pressure hollow-fibre ultra-filtration membrane subassembly and ABS anticorrosive engineering plastic pipe valve of stainless steel. It has the advantages of beautiful shape, strong integrity, it's easy and convenient to operate and maintenance, management. It is mainly used for removing bacteria, heat resource, colloid atom and big molecule organic substance as goal separating course.

主要技术参数 Main Technical parameters

Model	YF1	YF2	YF3	YF4	YF5
Model of membrane	Hollow-fiber made by highly molecule Material adopting special technology				
The amount molecule being held off	10000-80000(MW)				
The production of purified water	1T/H	2T/H	3T/H	4T/H	5T/H
PH	2-13				
Working temperature	5-45degree				
Working pressure	<0.15MPa				
Working utilizing rate	>90%				

FSY 系列臭氧发生器 Ozone Sterilizer



产品描述 Product Description

采用日本当今最新技术生产的 FSY 系列 OZONE 发生器，其核心部件采用“高效粉末填充式 OZONE 发生器”比传统的玻璃管和陶瓷片 OZONE 发生器具有强度高、产量大、能耗低、寿命长等特点。是瓶装矿泉水、纯净水等理制灭菌消毒、除色、除臭、除味设备。The equipment is mainly used in water treatment project. It can produce great deal of ozone to clean and sterilize. The ozone-sterilization has advantages of quick speed, harmlessness, and it could not cause pollution again. It is the ideal sterilizer for bottled mineral water and pure water.



TB100(A) 全自动纸标贴标机

Paper / Sticker Labeling Machine



产品描述 Product Description

1. adopt mature PLC control system technology, make the whole machine stable and high-speed
2. adopt touch screen control system, make operation simple, practical and efficient
3. advanced pneumatic code system technology, make the printed letter clear, fast and stable
4. roll extrusion bottle, so that the labels attached more solid

The scope of application:

Especially applied to the label with electronic monitoring code, widely used in food, chemical, medical, cosmetic, electronics, hardware, auto parts, stationery, batteries, tapes, CD, cardboard boxes, various of oil and various specifications of packaging products

主要技术参数 Main Technical parameters

Model:	TB100(A)
Inner diameter of label:	Φ76mm
Max outer diameter of label:	≤ Φ300mm
Label width:	10-150mm
Label length:	20-250mm
Bottle diameter:	20-150mm
Bottle height:	30-250mm
Label precision:	± 1mm
Production capacity:	30-80 bottles/min (according to bottle and label size)
Power supply:	220V~50Hz/60Hz (according to the customer's requirement)
Power:	750W Weight: 500Kg
Dimension:	2440mm × 1500mm × 1400mm (L × W × H)

TB 全自动收缩膜套标机

Full Automatic Label Sleeving And Shrinking Machine




产品描述 Product Description

1. The machine is made of stain-steel and high quality Aluminum alloy, struction in reason, tighten, adjustment conveniently.
2. Not need ground feet bolts, move conveniently, flexible assort production field.
3. Shrink film volume label frame, according different volume label paper pipe adjusted ranges5-10
4. Transmission machine can be adjusted conveniently without tools, which make it more suitable for bottle sizes.
5. Forced insertion design proves reasonable and convenient.
6. Volume label cut of measure system ensure small error
7. Special designed knife plate is change free with the related specifications.
8. Newel nip system, change and installation rapidly without tools.
9. Disport bottle screw, located strap, transport chain adopts synchronization adjust model, adjust facility.
10. Introduce Japanese servo motor and high-precision photo electricity, the length of cutting label is precision.

主要技术参数 Main Technical parameters

机型 Model:	TB-150	TB-250	TB-350	TB-450
长 × 宽 × 高 (mm)	2400 × 1000 × 2200	2440 × 1000 × 2200	2440 × 1000 × 2200	2440 × 1000 × 2200
重量	600kg	600kg	700kg	800kg
电源		AC3-Phase 220V/380V		
速度	UP to 200BPM	UP to 300BPM	UP to 400BPM	UP to 500BPM
高度		MAX320mm		
直径		Φ50-Φ110		
材质		玻璃、金属、塑胶 GLASS、METAL、PLASTIC		
形状		圆、椭圆、方型、长方形 ROUND、OVAL、SQUARE、RECTANGLE		
材质		PVC、PET、OPS、OPP		
厚度		0.035-0.10mm		
标签长度	MAX150mm	MAX150mm	MAX200mm	MAX200mm
标签直径	MAX175mm	MAX175mm	MAX175mm	MAX175mm


MB 收缩膜包装机 MB Wrapping And Heat Shrinking Machine



产品描述 Product Description


Frequency control,Secondary bottle transport device.
The whole set which are push bottle,heat sealing cutting adopt pneumatic structure.
Inductive switch control film length.

Touch screen,PLC control system advanced reliability of the equipment function.
Circular wind machine ,resure well--proportioned temperature of the shrink furnace.
Strong cooling system can reassure finalize the design quickly.
Heat-fast Teflon transport net,transport steady,high strength and stand wear and tear.
Frequency conversion timing net transportation structure.
The height of the conveyer belt can be made according to the user,adjustable range = 50mm
Bottle transport machine can satisfy the direction of the user,It can prolong and shorten
Peryoid stainless iron heating system,durability.
Satisfy the bear storage rack device of the short duration for the product,assure consecutive work for the production line.

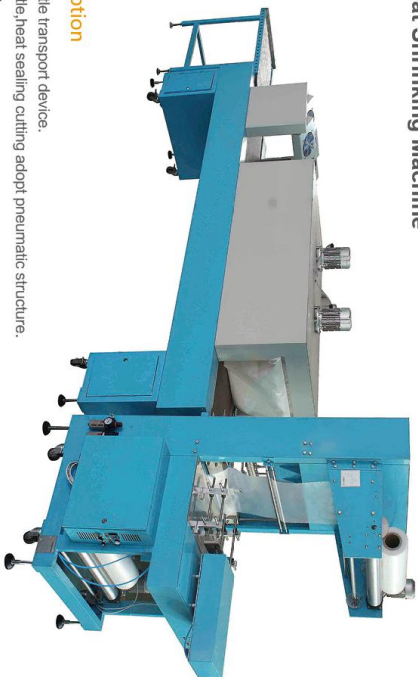


CPZ 高速吹瓶机 Full Automatic Blow Moulding Machine

产品描述 Product Description

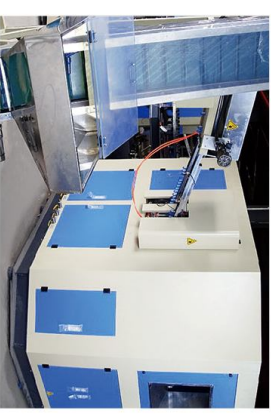

1. Automatic perform input and ready bottle output system.
2. Machine adopt with the overall structure of super-standard anti-vibration design, high-speed operation state of the machine will shake down to a minimum.
3. Machine adopts modular assembly method, greatly decrease the local amendments due to technological improvements when the machine is on processing.
4. The structure of machine oven adopt the international most advanced energy-saving technology of infrared radiation heating, temperature control with automatic negative feedback, closed-loop regulation model.
5. Automation controlling item adopts international high-end computer system, heating, collecting and measuring perform temperature with simulation input and output module.
6. Man-machine interface displays current production situation, available for on line switching, parameter modification and production accounting, with automatic alarm, automatic fault detection and diagnose.
7. Storing more than 7 kinds specification for making bottle.
8. Adopt latest international air pneumatic.
9. In order to save air, we choose high pressure blowing exhaust recovery system, which can save energy by 10-15%.

CP 半自动吹瓶机 Semi-Automatic Blow Moulding Machine

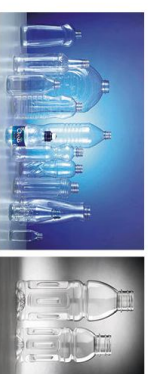

产品描述 Product Description

1. Adopt the new type double bend arm and four pull-rod-clamping structure (won the patent). The distance between two mold board is adjusted by the chain wheel. Thus, the clamping force is very strong.
2. The machine frame is produced by the whole complete casting bottom.
3. Adopt the straight slide way, reduce the friction and lengthen the life of the machine.
4. Double start working button, which is designed for avoiding the injury.
5. Power saving design that can increase your profits.
6. The single direction of pre-form placing and bottle picking.





直线式灌装生产线
Linear type filling line



Air conveyor



Belt conveyor




工厂布局 Complete factory layout



工厂布局 Complete factory layout



企业资质 · 品质保证
Enterprise certificate & Quality Guarantee

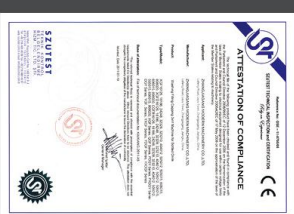

我们坚守稳定的产品质量，恪守产品的表里如一，信奉制造的一丝不苟，从设计、制造、检测、到管理，每一道工序，每一个环节，专家式的管理，显著露出 ISO9001:2000 的规范化和标准化。

Sticking to stable product quality, standing to inside equaling outside of products, and believing in meticulous manufacturing, we implement expert management in each process and in each link from design, manufacture, inspection and management, which demonstrates the standardization of ISO9001:2000.





www.zjgmodern.com

Company Information:

ZHANGJIAGANG MODERN MACHINERY CO.,LTD.

Contacts: Mr Steven Wang
 Email: modernbeveragemachinery@gmail.com
 wangpingxy11@gmail.com
 Mobile Phone: +86 13773267104
 Telephone: +86 512 58195745
 Fax: +86 512 58195745
 Address: Lefeng Road, Leyu Town, Zhangjiagang, Jiangsu, China.

张家港摩登机械有限公司

地址: 江苏省张家港市乐余镇乐丰路
 手机: 13773267104
 电话: 0512-58195745
 传真: 0512-58195745
 邮编: 215600

We are the manufacturer that have more than 20 years history profession in making Water Treatment System, Beverage Sterilizing System, Mixing System, Filling System, Packing System and so on.